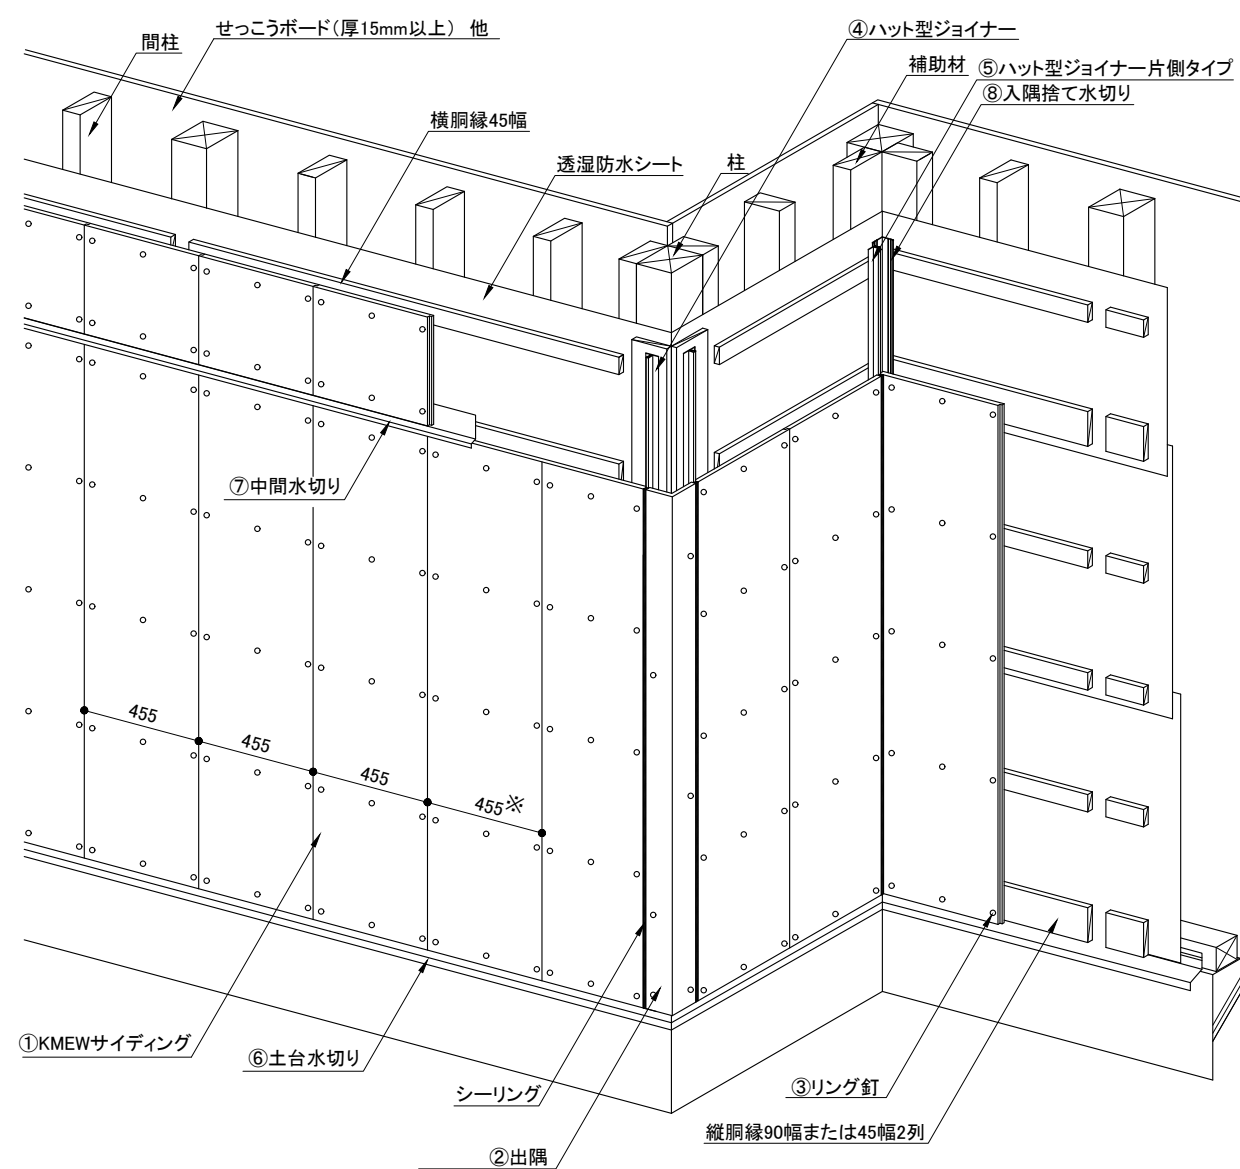
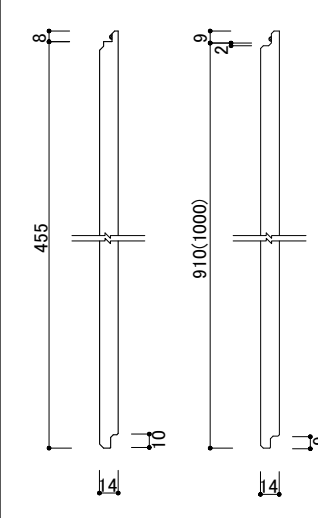
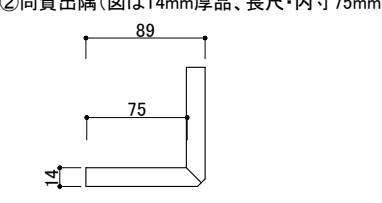










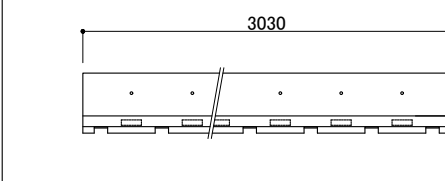


窯業系サイディング/木造・縦張り/釘留め施工/45分準耐火構造 参考納まり図					QF045BE-9226		
1	土台部	2	目地部(合いじゃくり)	3	目地部(縦断面)	4	出隅部
5	入隅部	6	開口部(縦断面)	7	開口部(横断面)	8	軒天部

I. 全体図		II. 部品図			
 ※広幅商品は910mmまたは1000mm		①KMEWサイディング (図は14mm厚品)  長さ: 3030mm			
		②同質出隅 (図は14mm厚品、長尺・内寸75mm)  品番: B211※※※ 長さ: 3030mm ○差込み出隅14  品番: BA61※※※※ (MF塗装品) BS61※※※※ (無塗装品) 長さ: 3030mm			
		③リング釘40  品番: B8740※※※	④ハット型ジョイナー 14mm厚用  品番: B271 厚み: 0.3mm 長さ: 3030mm ○18・16mm厚用  品番: B2713 厚み: 0.3mm 長さ: 3030mm		
		⑥土台水切り  品番: B239W※ 厚み: 0.35mm 長さ: 3030mm	○土台水切り50  品番: B238W※ 厚み: 0.35mm 長さ: 3030mm	⑦中間水切り 14mm厚用  品番: RE225※※※/B221※※※ 厚み: 0.3mm 長さ: 3030mm ○18・16・15mm厚用  品番: RE224※※※/B224※※※ 厚み: 0.3mm 長さ: 3030mm	
		⑧入隅捨て水切り  品番: RCILK 厚み: 0.35mm 長さ: 3030mm	○見切り縁 14mm厚用  品番: B252W※ 厚み: 0.35mm 長さ: 3030mm ○見切り縁 16・15mm厚用  品番: B253W※ 厚み: 0.35mm 長さ: 3030mm	○縦張り釘留め用補助部材  品番: B10027W※B 厚み: 0.8mm	